


# INDUSTRIAL ROTATOR CPR9 (PATENTED)

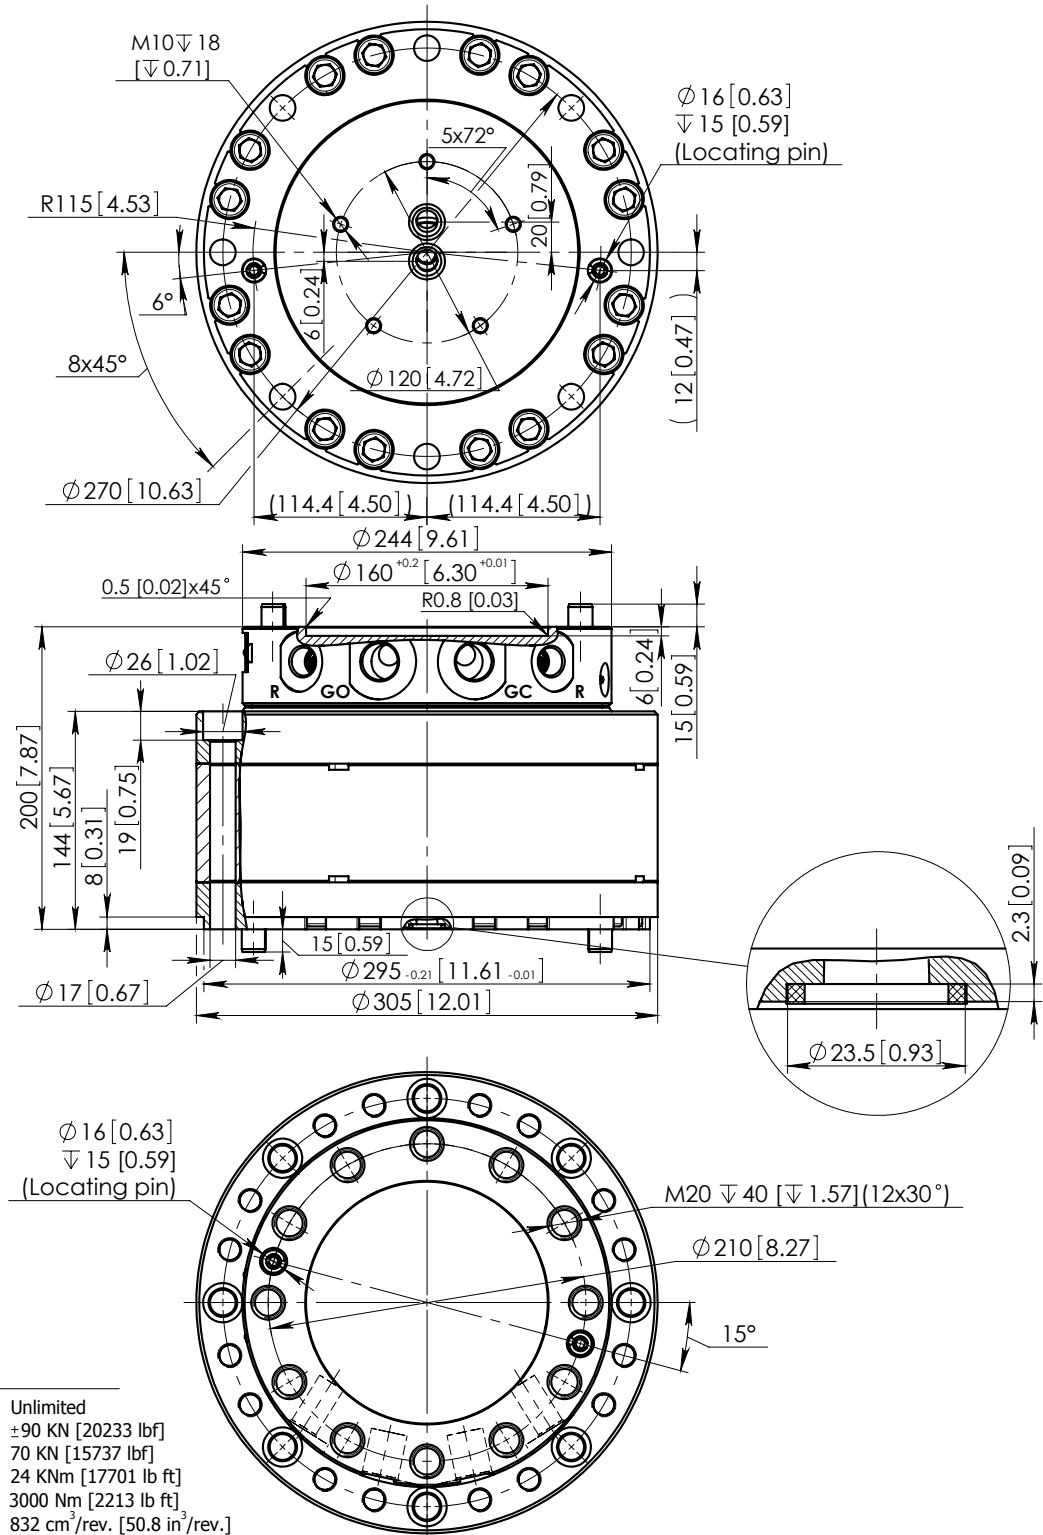

## Technical data

Rotation	Unlimited
Max axial load	$\pm 90$ KN [20233 lbf]
Max radial load	70 KN [15737 lbf]
Moment of deflection	24 KNm [17701 lb ft]
Torque at 25 Mpa	3000 Nm [2213 lb ft]
Rated displacement	832 cm <sup>3</sup> /rev. [50.8 in <sup>3</sup> /rev.]
Rotation speed	max 30 rpm
Oil duct area for grapple	150 mm <sup>2</sup> [0.232 in <sup>2</sup> ]
Weight	91 kg [201 lb]

Function	Max working pressure	Rec oilflow	Connection
<b>R</b> - rotation	25 MPa [3625 psi] *	30 l/min [7.9 gal(US)/min]	G 1/2
<b>GO</b> - grapple/tool open	35 MPa [5076 psi]		G 3/4
<b>GC</b> - grapple/tool close	35 MPa [5076 psi]		G 3/4

\* Relief valves fitted